

Uncertainty in Compartmental Models for Hazardous Materials - A Case Study

Roger Cooke Bernd Kraan
Delft University of Technology ¹

Abstract

Performing uncertainty analysis on compartmental models is the main topic of this article. Elements of the methodology developed during a joint CEC/USNRC accident consequence code uncertainty analysis are introduced. The uncertainty is quantified using structured expert judgment. Experts are queried about physically observable quantities. Many code input parameters of the accident consequence codes are not physically observable but are used to predict observable quantities. Therefore a probabilistic inversion technique was developed which 'transfers' the uncertainty from the physically observable quantities to the code input parameters. The probabilistic inversion technique is illustrated using the compartmental model of systemic retention of *Sr* in the human body. The article is concluded with a discussion on capturing uncertainty via compartmental models.

Key words: uncertainty analysis, expert judgment, compartmental models, probabilistic inversion, maximum entropy.

1 Introduction

The 'hazardousness' of a given material is typically expressed in terms of size of response in humans per unit exposure. Choosing the proper hazard dimensions for a given substance is hardly a trivial task, but even when these dimensions have been selected, substantial uncertainty may remain. Direct experimental data on humans is usually scarce, and indirect data, e.g. involving animal experiments, are often difficult to interpret. Therefore, in environmental studies, the dose response models associated with hazardous materials are often a dominant contributor to uncertainty in the predicted results.

As decision makers learn to appreciate the substantial uncertainties in environmental transport or compartmental models, they typically request a quantification of these uncertainties. This in turn requires quantification of the uncertainties over input parameters in the dose response models of the hazardous substances.

¹Delft University of Technology, Faculty of Information Technology and Systems, Department of Control, Risk, Operations Research, Statistics, Stochastics, Mekelweg 4, 2628 CD Delft, The Netherlands.

This article discusses an element of the methodology for quantifying uncertainty in environmental models for hazardous substances developed in a joint research project with the Commission of the European Communities (CEC) and the United States Nuclear Regulatory Commission (USNRC) (see [3],[4],[5],[6],[7],[8]). The method aims at quantifying the uncertainty in accident consequence codes for commercial nuclear power plants using structured expert judgment and probabilistic inversion. One compartmental model for one substance, namely the acyclic compartmental model describing systemic retention of Strontium in the human body, is taken to illustrate the methodology.

Section two briefly describes relevant features of the joint research project. Section three describes the acyclic compartmental model for systemic retention of Strontium. Section four discusses how the uncertainty has been quantified and section five discusses probabilistic inversion. Section six discusses uncertainty modeling from a general perspective.

2 Joint CEC/USNRC Project

To estimate the risks and consequences of hypothetical accidents with commercial nuclear power plants, the CEC and USNRC separately developed Probabilistic Accident Consequence Codes (PACCs), COSYMA and MACCS, respectively. Since many modeling parameters in the codes are uncertain, these organizations decided jointly to establish a methodology and provide a base of information in order to perform uncertainty analysis on the calculations of PACCs. Available data are sparse and, as both organizations wanted to allow for a diversity of viewpoints, formal expert judgment elicitation was used to quantify the uncertainties. The goal of eliciting expert judgments is to encode degrees of belief into probability distributions.

Research institutes in Europe (TU Delft, National Radiological Protection Board, Energiecentrum Nederland, Forschungszentrum Karlsruhe) and in the United States (SANDIA National Laboratories, U. of Hawaii at Hilo, U. of Arizona) formulated the objectives for this joint effort. The broad objectives are stated in [5]:

- to formulate a generic, state-of-the-art methodology for uncertainty estimation which is capable of finding broad acceptance.
- to apply the methodology to estimate the uncertainties associated with the predictions of PACCs designed for assessing consequences of accidents at commercial nuclear power plants.
- to better quantify and obtain more valid estimates of the uncertainties associated with the PACCs, thus enabling more informed and better judgments to be made in the areas of risk comparison and acceptability and therefore to help set priorities for future research.
- to systematically develop credible and traceable uncertainty distributions

for the respective code input variables using formal expert judgment elicitation process.

Expert panels were formed for the following areas of the PACCs: atmospheric dispersion, deposition, external doses, foodchain, early health effects, late health effects and internal dosimetry. The case study discussed in this article is taken from the uncertainty analysis on the internal dosimetry module of the codes.

3 Compartmental Model for Sr

In this project, systemic retention of Sr in the human body is described by the acyclic compartmental model shown in Figure 3.1.

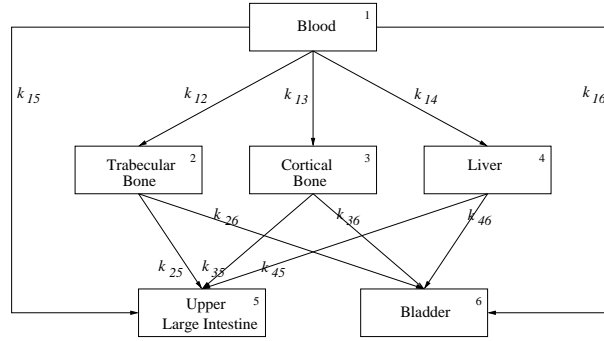


Figure 3.1: *Acyclic compartmental model for the systemic retention of Sr*

The transfer coefficient k_{ij} , represents the proportion of material in compartment i moved to compartment j in a small time interval. The compartmental model determines a set of first order linear differential equations which, with the appropriate conditions, fully specify the movement of material between the compartments.

Although the transfer coefficients cannot be measured directly, the following relationships are assumed to hold on the basis of physical considerations:

1. The transfer coefficients from compartment i to Bladder are modeled as

$$k_{i6} = U:F * k_{i5} \quad (1)$$

with $i \in \{1, \dots, 4\}$ and $U:F$ the Urine-to-Faeces ratio for Sr . The $U:F$ -ratio for Sr was set to 3.3.

2. It was assumed that the transfer coefficient from Blood to Trabecular Bone, k_{12} is fully correlated to the transfer coefficient from Blood to Cortical Bone, k_{13} in the following manner:

$$k_{12} = tc * k_{13} \quad (2)$$

where tc is the Trabecular-to-Cortical factor, tc and k_{13} are considered uncertain.

Based on the compartmental model shown in Figure 3.1, equations (1) and (2) and initial conditions², the equation describing the proportion of the amount of Sr existing at time $t = 0$ in the blood that is retained in, for example, the Skeleton (Trabecular Bone and Cortical Bone) and Liver at time t is:

$$\begin{aligned}
m_{\text{Skeleton+Liver}} &= m_2(t) + m_3(t) + m_4(t) \\
&= tc k_{13} \frac{e^{-4.3 k_{25} t} - e^{-(k_{13}(1+tc)+k_{14}+4.3 k_{15})}}{k_{13}(1+tc) + k_{14} + 4.3 k_{15} - 4.3 k_{25}} + \\
&\quad + k_{13} \frac{e^{-4.3 k_{35} t} - e^{-(k_{13}(1+tc)+k_{14}+4.3 k_{15})}}{k_{13}(1+tc) + k_{14} + 4.3 k_{15} - 4.3 k_{35}} + \\
&\quad + k_{14} \frac{e^{-4.3 k_{45} t} - e^{-(k_{13}(1+tc)+k_{14}+4.3 k_{15})}}{k_{13}(1+tc) + k_{14} + 4.3 k_{15} - 4.3 k_{45}}
\end{aligned} \tag{3}$$

Besides calculating the amount of Sr retained in any compartment at any time, the compartmental model is used in calculating the dose per unit intake (dose coefficient) of any compartment. These dose coefficients are used in further calculations of health effects.

From this point on we will refer to the acyclic compartmental model describing systemic retention of Sr in the human body, as shown in Figure 3.1, as the Sr -model.

4 How to Quantify Uncertainties?

The Sr -model in Figure 3.1 is typical of models used by international bodies charged with setting standards for radiation exposure for the general public and for radiological workers [9].

We have seen that the Sr -model can be used to compute dose coefficients. Compartmental models, like the Sr -model make strong assumptions, in particular:

- These and only these compartments are involved in the transfer of material.
- The rates of transfer from a source-compartment to a sink-compartment are proportional to the amount of material in the source compartment, and independent of all other physical variables.

The model itself is not derived from underlying physical laws, nor can it be verified by direct observation, most of the transfer coefficients cannot be measured by experiment.

The uncertainty analysis team is tasked with quantifying the uncertainty attending the use of such models in a traceable and defensible way. If these

²Initial conditions for systemic retention of Sr are $m_1(t = 0) = 1$ and $m_i(t = 0) = 0$, where $i = 2, \dots, 6$

models were derived from accepted physical laws, and if the transfer coefficients could be measured, subject to measurement error, then the quantification of uncertainty would be straightforward. The transfer coefficients would be regarded as drawn from a sampling distribution reflecting measurement error, and the uncertainty attending the use of such models would be obtained by propagating the sampling distribution through the model.

The above remarks make it clear that this straightforward method of quantifying uncertainty is not available for compartmental models like the *Sr*-model. The method by which these models are chosen and quantified cannot form the basis for a quantification of uncertainty. Indeed, the uncertainty analysis team did not encounter any generic method for choosing and subsequently quantifying such models. The type of arguments leading to a choice of a given model are peculiar to the species in question. Once a compartmental model is chosen, the method for determining the values of the transfer coefficients is also highly specific to the problem at hand and involves a great deal of qualitative reasoning.

The absence of direct physical measurements of transfer coefficients means that the uncertainty cannot be determined by objective statistical methods, rather the relevant uncertainty takes the form of subjective uncertainty of experts. The uncertainty must be quantified using structured expert judgment. At the same time, the lack of validation for the models themselves entails that we cannot simply ask experts "what is your uncertainty in transfer coefficient k_{13} of the *Sr*-model" as the uncertainty analysis team may not make any assumption regarding the model the experts should use.

4.1 Target variables & Elicitation Variables

At the inception of the joint project, the project team adopted the position that experts would be queried only about the results of possible measurements. Physically feasible measurement set-ups would be specified, values of all variables would be specified to the degree that they are read by the PACCs. Values of variables which are not read into the PACCs are left unspecified, and uncertainty over these values must be folded into the uncertainty over the measurement outcomes by the experts. Experts are then asked to state their uncertainty distributions over the possible outcomes of the measurements. By configuring the expert elicitations in this way, the experts' uncertainty is conditionalized on the knowledge that the user of the PACC possess during any given application.

The uncertain code input parameters for which an uncertainty distribution has to be determined will be called *target variables*. The quantities for which the experts have to provide assessments will be called *elicitation variables*. The target variables in the *Sr*-model are $(k_{13}, k_{14}, k_{15}, k_{25}, k_{35}, k_{45}, tc)$. From the discussion earlier it is clear that they cannot serve as elicitation variables. Elicitation variables were formulated on the amount of *Sr* retained in certain regions of the human body at certain times, after being administered intravenously as a single injection. The regions of the human body for which the experts were queried are the Skeleton+Liver and the Skeleton as a percentage of Skeleton+Liver. The

elicitation questions are listed in Appendix A. Experts were asked to consider two populations: adults and 5 year old children. In this article we focus on adults only. For all elicitation variables the experts were asked to state the 5%, 50% and 95% quantiles of their subjective distribution.

The elicitation variables cover important contributions to uncertainty in calculating doses from radionuclides reaching blood. Factors omitted in the Sr -model that might also contribute significantly to uncertainties are the location of sensitive cells in Bone and absorbed fractions for alpha- and beta- emitting Bone seekers, and tissue mass and geometric considerations. Experts are encouraged to take these factors into account in their uncertainty distributions.

4.2 Aggregated Expert Results

Once the expert uncertainty distributions are obtained, these uncertainties must be aggregated to form one uncertainty distribution, and this distribution must be used to derive an uncertainty distribution over the transfer coefficients of the Sr -model. The method of aggregation is not the focus of this article, for more detailed information see [2] and references therein. For the data analysed here, a simple arithmetic average of the experts' uncertainty distributions has been used. Aggregated expert results for the elicitation variables are given in Table 4.1.

Question	Quantile	1 day	1 week	1 month	1 year	10 years	50 years
Skel+Liver	5%	0.17	0.12	0.1	6.74e-2	1.8e-2	1.1e-3
	50%	0.32	0.23	0.21	0.14	6.5e-2	1.8e-2
	95%	0.58	0.48	0.35	0.24	0.14	8.9e-2
$\frac{\text{Skel}}{\text{Skel+Liver}}$	5%	0.85	0.82	0.85	0.77	0.68	0.64
	50%	0.96	0.96	0.98	0.99	0.99	0.99
	95%	0.998	0.998	0.999	0.999	0.999	0.999

Table 4.1: *Quantile information of aggregated experts based on equal weights for the two types of elicitation questions for adults*

In looking at the written rationales of the experts [6], it became clear that every expert used the ICRP 67 model for Sr (comparable to Figure 3.1) in determining their median values. They stated that Sr is the best understood element of the Alkaline Earth Elements. Furthermore, they all consider the retention in the Liver to be negligible compared to the retention in the Skeleton.

The next section explains how the aggregated expert results are used to determine an uncertainty distribution on the target variables for the Sr -model.

5 Probabilistic Inversion

Suppose we had a distribution over the transfer coefficients of the Sr -model. We could then push this distribution through the compartmental model and obtain a distribution over, for example the retention at various times in the Skeleton

and Liver using equation 3. The problem at hand involves reversing this procedure: we have quantiles of distributions over retention in certain compartments at certain times, namely the aggregated expert uncertainty distributions (as in Table 4.1); and we seek a distribution over the transfer coefficients which, when pushed through the compartmental model, yields quantiles over retentions agreeing with those from the experts. Hence our problem is one of probabilistic inversion: we must invert the compartmental model so as to 'pull back' the distribution over the retention in certain compartments at certain times onto the transfer coefficients of the model.

Let H represent a distribution over retention in given compartments at given times. Let F represent a distribution over transfer coefficients in the Sr -model, and let $G(F)$ represent the distribution over retention in the given compartments at the given times, obtained by pushing the distribution F through the model G . Then our problem may be represented as: Find F such that $G(F) \sim H$, where ' \sim ' means 'has the same distribution as', or equivalently, $F \sim G^{-1}(H)$.

Note that a probabilistic inverse $G^{-1}(H)$ may not exist, and if it exists it will be in general not unique. Therefore we must have a method of selecting a preferred distribution in case of non-uniqueness and a method of choosing a best fitting distribution in case of non existence.

Note also that probabilistic inversion is not restricted to expert judgment only. Distributions obtained from a series of experiments under similar conditions can also be used as input in the probabilistic inversion technique.

5.1 PREJUDICE

The acronym PREJUDICE stands for PProcessing Expert JUDgment Into Code paramEters. We will illustrate the different steps using the following compartmental model, see Figure 5.1




Figure 5.1: *Compartmental model*

Suppose we want to perform an uncertainty analysis on the compartmental model shown in Figure 5.1. The equations describing the retention in the different compartments are:

$$m_A(t) = e^{-(k_{AB}+k_{AC})t} \quad (4)$$

$$m_B(t) = \frac{k_{AB}}{k_{AB} + k_{AC}} (1 - e^{-(k_{AB}+k_{AC})t}) \quad (5)$$

$$m_C(t) = \frac{k_{AC}}{k_{AB} + k_{AC}} (1 - e^{-(k_{AB}+k_{AC})t}) \quad (6)$$

In performing the uncertainty analysis, a joint distribution over (k_{AB}, k_{AC}) is required, i.e. (k_{AB}, k_{AC}) are the target variables. From the discussion above, it was concluded that the transfer coefficients cannot serve as elicitation variables. Therefore the elicitation variables are on the retention of material in compartments B and C at certain times t_i ($i = 1, \dots, n$) after a unit deposit in compartment A , represented by Y_i and Z_i ($i = 1, \dots, n$). Figures 5.2, 5.3 and 5.4 depict the probabilistic inversion for $n = 1$. In determining the distribution over the target variables all elicitation variables are used.

Step 1 Support of Distribution: In this step the support of the distribution over the target variables is determined.

For each i , $i = 1, \dots, n$, an elicited quantile is chosen for Y_i and Z_i , say y_{i,j_i} and z_{i,k_i} , where $j_i, k_i \in \{1, 2, 3\}$. The set

$$s = (y_{1,j_1}, z_{1,k_1}, \dots, y_{n,j_n}, z_{n,k_n}) \quad (7)$$

is called a scenario. Let \mathcal{S} be the set of all scenarios. Next, each scenario is tested for physical admissibility; in this example $(m_B(t), m_C(t))$ are increasing functions of t . Therefore $s \in \mathcal{S}$ is admissible only if $y_{i,j_i} < y_{i+1,j_{i+1}}$, where $i = 1, \dots, n-1$, and similarly for z . Let \mathcal{S}^* denote the set of admissible scenarios.

For each scenario $s \in \mathcal{S}^*$, estimates (k_{AB}^s, k_{AC}^s) for the target variables are determined, such that the quadratic difference between model output and scenario s is minimized.

$$\begin{aligned} & \sum_{i=1}^n \left(\frac{k_{AB}^s}{k_{AB}^s + k_{AC}^s} (1 - e^{-(k_{AB}^s + k_{AC}^s)t_i}) - y_i^s \right)^2 + \\ & + \sum_{i=1}^n \left(\frac{k_{AC}^s}{k_{AB}^s + k_{AC}^s} (1 - e^{-(k_{AB}^s + k_{AC}^s)t_i}) - z_i^s \right)^2 \end{aligned} \quad (8)$$

For each target variable, intervals are determined which are (1) mutually exclusive and (2) whose union covers all estimates. In this way, each estimate (k_{AB}^s, k_{AC}^s) falls in one hypercube of the target variable space. A number of samples are taken uniformly from each such hypercube and propagated through the model using equations (5) and (6) for $t = t_1, \dots, t_n$. This generates a set of points in the observable space. The samples taken in the target variable space will be the support of the distribution over the target variables and will be indicated by I . See Figure 5.2 for a graphical illustration, the pair (k_{AB}^*, k_{AC}^*) is sampled uniformly from the rectangle $B_{1,5} \times B_{2,2}$ and mapped into the observable pair $(m_B^*(t_1), m_C^*(t_1))$.

Step 2 Determination of Distribution: Note that the axis of the observable space, in which the propagated samples are defined, can be associated with elicitation variables Y_i and Z_i , $i = 1, \dots, n$. 5%, 50% and 95% quantiles of the distributions of each elicitation variables are available.

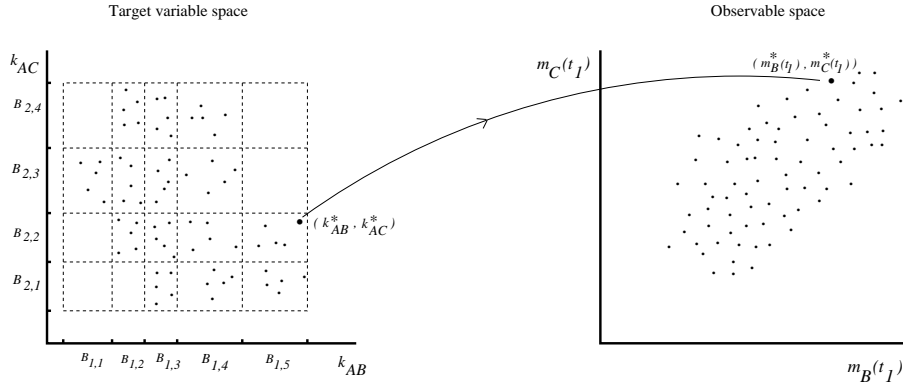


Figure 5.2: *Propagation of samples*

Briefly, a joint distribution over the propagated samples in the observable space is determined, which has maximum entropy with respect to the uniform background measure and such that for each elicitation variable Y_i and Z_i , the quantile information of the marginal distribution complies with the quantile information of the distribution of Y_i and Z_i .

Each propagated sample in the observable space thus receives a probability and each point in I is assigned the probability associated with its image in the observable space. In this way a distribution over I is determined. Details are given in the next section.

5.2 Determination of Distribution

The number of distributions over the propagated samples which will satisfy the constraints on the quantile information on Y_i and Z_i , as described in **Step 2**, may be large. From this set of distributions we want to select *one* distribution: the distribution which has maximum entropy with respect to the uniform background measure [10],[12]. Determining the joint distribution which has maximum entropy with respect to the uniform background measure can be formulated as a constrained Non-Linear Programming (NLP) problem.

To describe the NLP problem, we introduce a set of hypercubes in the observable space. For elicitation variable Y_i , we distinguish four intervals

$$(-\infty, y_{i,5\%}], (y_{i,5\%}, y_{i,50\%}], (y_{i,50\%}, y_{i,95\%}], (y_{i,95\%}, \infty)$$

In the same way we distinguish four intervals for elicitation variable Z_i . Taking the product of all such intervals, for all elicitation variables, we generate a set of "observable hypercubes", indexed as $i_1 \dots i_{2n}$, where $i_j \in \{1, 2, 3, 4\}$. Thus $i_j = 3$ means that we consider interval $(y_{j,50\%}, y_{j,95\%}]$ for elicitation variable Y_j . For 2 elicitation variables, Y_1 and Z_1 the observable hypercubes are shown in Figure 5.3.

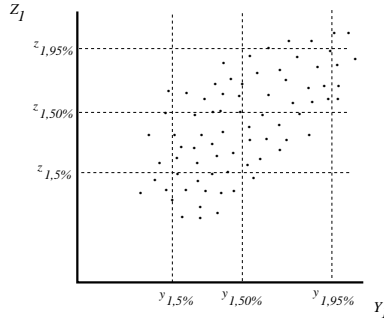


Figure 5.3: *Observable Hypercubes*

The NLP problem may be formulated as follows

$$\begin{aligned}
 & \text{maximize} - \sum_{i_1=1}^4 \sum_{i_2=1}^4 \cdots \sum_{i_{2n}=1}^4 c_{i_1 \dots i_{2n}} p_{i_1 \dots i_{2n}} \ln p_{i_1 \dots i_{2n}} + C \\
 & \sum_{i_2=1}^4 \cdots \sum_{i_{2n}=1}^4 c_{1i_2 \dots i_{2n}} p_{1i_2 \dots i_{2n}} = 0.05 \quad \cdots \quad \sum_{i_1=1}^4 \cdots \sum_{i_{2n-1}=1}^4 c_{i_1 \dots i_{2n-1}1} p_{i_1 \dots i_{2n-1}1} = 0.05 \\
 & \sum_{i_2=1}^4 \cdots \sum_{i_{2n}=1}^4 c_{2i_2 \dots i_{2n}} p_{2i_2 \dots i_{2n}} = 0.45 \quad \cdots \quad \sum_{i_1=1}^4 \cdots \sum_{i_{2n-1}=1}^4 c_{i_1 \dots i_{2n-1}2} p_{i_1 \dots i_{2n-1}2} = 0.45 \\
 & \sum_{i_2=1}^4 \cdots \sum_{i_{2n}=1}^4 c_{3i_2 \dots i_{2n}} p_{3i_2 \dots i_{2n}} = 0.45 \quad \cdots \quad \sum_{i_1=1}^4 \cdots \sum_{i_{2n-1}=1}^4 c_{i_1 \dots i_{2n-1}3} p_{i_1 \dots i_{2n-1}3} = 0.45 \\
 & \sum_{i_2=1}^4 \cdots \sum_{i_{2n}=1}^4 c_{4i_2 \dots i_{2n}} p_{4i_2 \dots i_{2n}} = 0.05 \quad \cdots \quad \sum_{i_1=1}^4 \cdots \sum_{i_{2n-1}=1}^4 c_{i_1 \dots i_{2n-1}4} p_{i_1 \dots i_{2n-1}4} = 0.05
 \end{aligned}$$

where $p_{i_1 \dots i_{2n}} \geq 0$. $c_{i_1 \dots i_{2n}}$ represents the number of propagated samples falling in observable hypercube $i_1 \dots i_{2n}$, and C is the constant $\ln \left(\sum_{i_1, \dots, i_{2n}} c_{i_1 \dots i_{2n}} \right)$. NLP problem (9) is solved for $p_{i_1 \dots i_{2n}}$. The $p_{i_1 \dots i_{2n}}$ represent the probability of each sample in observable hypercube $i_1 \dots i_{2n}$. It is easy to see that (9) is a convex optimization problem. The interior point solver for large-scale convex problems [1] avoids problems with $p_{i_1 \dots i_{2n}} = 0$ and gave excellent performance. In Figure 5.4 the highlighted point receives probability $p_{3,4}$ and the probability is assigned to the pre-image of this point, (k_{AB}^*, k_{AC}^*) in the target variable space.

5.3 Dealing with infeasibilities

The above NLP problem may not be feasible. In this case we reduce the dimension of the observable space. Still considering the simple model of Figure 5.1, with $2n$ elicitation variables, suppose the NLP problem (9) is infeasible. The idea is to look at $\binom{2n}{2n-1}$ problems of dimension $2n - 1$. For each of the $\binom{2n}{2n-1}$ problems, **Step 1** and **Step 2** are carried out. Because all steps of the solution scheme are carried out for each problem, the support associated with the different problems will likely to be different. Let N ($N \leq \binom{2n}{2n-1}$) denote the number of NLP problems for which a distribution in **Step 2** can be determined. Assuming that $N > 0$, we have obtained N distributions over the target variables on their specific supports. We are now confronted with the problem of finding a

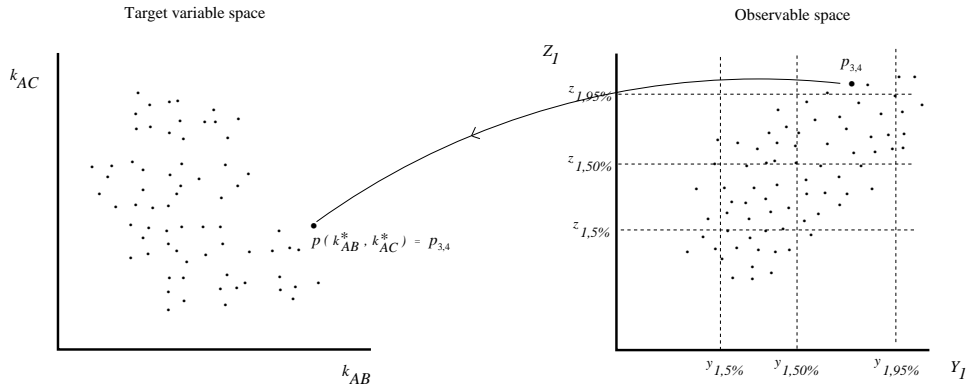


Figure 5.4: 'Pullback'-distribution

distribution over the target variables which "best fits" the N distributions. For the solution of this problem we refer to [11].

If $N = 0$ we will reduce the dimension of the problem once more, and perform **Step 1** and **Step 2** for $\binom{2n}{2n-2}$ problems of dimension $2n - 2$.

The details are omitted here; the NLP problem for the Sr -model was feasible.

5.4 Compartmental Model for Sr : results

The dimension of the target variable space for the Sr -model is 7 and the dimension of the observable space is 12. The Sr -model was probabilistically inverted to determine a distribution over $(k_{13}, k_{14}, k_{15}, k_{25}, k_{35}, k_{45}, tc)$. There were 1269 admissible scenario's and these were used to generate 1.269.000 samples in the target variable space as described in **Step 1**. The samples were propagated through the appropriate model predictors.

Quantile information for the marginal distributions and the rank correlation matrix among the target variables are given in Table 5.1 and Table 5.2, respectively.

Quantile	k_{13}	k_{14}	k_{15}	k_{25}	k_{35}	k_{45}	tc
5%	6.89e-2	7.7e-4	5.54e-2	1.45e-5	2.63e-5	7.33e-6	0.29
50%	2.18e-1	9.57e-4	2.68e-1	2.74e-2	5.48e-5	4.09e-5	2.03
95%	6.97e-1	7.25e-2	3.53e-1	1.22e-1	7.41e-2	7.41e-2	2.35

Table 5.1: Quantile information for the target variables

To determine how well the probabilistic inversion technique performs, the aggregated expert quantiles in Table 4.1 are compared to quantiles obtained by "pushing" the distribution over the target variables through the appropriate model predictors. Thus we regard $m_{\text{Skeleton+Liver}}(t_i)$, (equation 3), as a function of random variables $(k_{13}, k_{14}, k_{15}, k_{25}, k_{35}, k_{45}, tc)$ for 1 day, 1 week, 1 month, 1

k_{13}	1	-0.04	0.42	-0.61	-0.46	-0.45	-0.62
k_{14}	-0.04	1	-0.45	0.12	-0.27	-0.03	0.04
k_{15}	0.42	-0.45	1	-0.20	0.27	0.17	-0.25
k_{25}	-0.61	0.12	-0.20	1	-0.85	0.12	0.60
k_{35}	-0.46	-0.27	0.27	-0.85	1	0.01	-0.87
k_{45}	-0.45	-0.03	0.17	0.12	0.01	1	-0.02
tc	-0.62	0.04	-0.25	0.60	-0.87	-0.02	1

Table 5.2: Rank correlations among target variables

year, 10 years and 50 years, see Table 4.1. The columns headed with Agg. Exp. give the aggregated expert assessments, the columns headed with Pred. give the 'push-through' results based on the distribution over the target variables as determined with PREJUDICE. For performing a large uncertainty analysis it is often necessary to represent the joint distribution in terms of marginal distributions and rank correlation coefficients. The columns "Marg. Rank." give the 'push-through' results based on the distribution over the target variables which has maximum entropy satisfying the marginal distributions and rank correlation matrix given by PREJUDICE. Note that PREJUDICE fits the aggregated expert results quite well, and that the Marg. Rank. is poor for the 5% quantiles for $\frac{\text{Skel}}{\text{Skel}+\text{Liver}}$.

6 Uncertainty Capture

Physical models like the compartmental model discussed above are traditionally used with 'best estimates' of the transfer coefficients to predict phenomena. When we cannot infer the models from accepted laws and cannot measure the values of the transfer coefficients, then the predictions of the models are uncertain. Straightforward use of the model with 'best estimates' does not give any picture of the uncertainty attending model predictions. We suggest that these models can be legitimately employed to capture uncertainty. This employment differs in fundamental ways from straightforward prediction.

Capturing uncertainty in observable phenomena via distributions over transfer coefficients involves:

- (i) using structured expert judgment to quantify uncertainty on measurable quantities predicted by the compartmental model.
- (ii) performing probabilistic inversion to pull this uncertainty back onto the transfer coefficients of the model.
- (iii) comparing the uncertainty pushed through the model with the experts' uncertainty.

Time		Skel+Liver			Skel Skel+Liver		
		Agg. Exp.	Pred.	Marg. Rank.	Agg. Exp.	Pred.	Marg. Rank.
1 day	5%	0.17	0.17	0.12	0.85	0.85	0.77
	50%	0.32	0.32	0.31	0.96	0.96	0.98
	95%	0.58	0.58	0.53	0.998	0.998	0.999
1 week	5%	0.12	0.12	0.11	0.82	0.82	0.67
	50%	0.23	0.23	0.26	0.96	0.96	0.97
	95%	0.48	0.48	0.55	0.998	0.998	0.998
1 month	5%	0.1	0.10	5.8e-2	0.85	0.85	0.58
	50%	0.21	0.21	0.2	0.98	0.98	0.96
	95%	0.35	0.35	0.49	0.999	0.999	0.999
1 year	5%	6.74e-2	6.74e-2	1.1e-2	0.77	0.77	4.4e-5
	50%	0.14	0.14	0.18	0.99	0.99	0.95
	95%	0.24	0.24	0.43	0.999	0.999	0.999
10 years	5%	1.8e-2	1.8e-2	4.8e-3	0.68	0.68	0
	50%	6.5e-2	6.45e-2	0.11	0.99	0.99	0.95
	95%	0.14	0.14	0.25	0.999	0.999	0.999
50 years	5%	1.1e-3	1.1e-3	2.1e-4	0.64	0.64	0
	50%	1.8e-2	1.85e-2	1.3e-2	0.99	0.99	0.97
	95%	8.9e-2	8.86e-2	7.4e-2	0.999	0.999	0.999

Table 5.3: Comparison Aggregated Expert result (Agg. Exp.) vs. PREJUDICE (Pred.) vs. Marginals and Rank Correlation (Marg. Rank.)

If there is an imperfect fit in step (iii), the conclusion is not that the model is wrong; rather, the conclusion is that we are unable to capture the experts' uncertainty via a joint distribution over its model parameters. There may be several reasons for this:

1. Although experts believe that the model is 'roughly right', their uncertainty may involve departures from the assumptions of the model. Thus with regard to Figure 3.1, experts may believe recirculation may occur from, for example Cortical Bone to Blood: under certain circumstances, a portion of material in the Cortical Bone may be transferred back to the blood. In this case the amount transferred to the Cortical Bone in a unit time would not be proportional to the amount in the blood. It may be impossible to capture the experts' uncertainty via a distribution over the transfer coefficients in Figure 3.1.
2. Although the experts each represent their uncertainties via distributions over the parameters of the ICRP 67 model for Sr , it may be impossible to represent their combined distribution in this way, taking account of physical constraints. For example, suppose each expert believes in the model of Figure 3.1 and believes that equation (2), $k_{12} = tc * k_{13}$, is correct, but they do not agree on the value of tc . If equation (2) is interpreted as a physical constraint with tc a constant (i.e. assuming a single value with probability one), then it may be impossible to capture the combined expert distribution via a distribution over model parameters satisfying equation (2), even though this is possible for each expert individually.

3. The mathematical processing may itself impose simplifications which cause a discrepancy in step (iii). Thus in Table 5.3 we see that representing the joint distribution over transfer coefficients as a maximal entropy distribution under marginal and rank correlation constraints introduces significant discrepancies.

Assuming that the fit in step (iii) is good, the use of models to capture uncertainty may involve features which are unfamiliar to experts and decision makers alike, and which deserve special attention:

1. The combined expert distribution will not in general agree with the distribution of any one expert. Typically, the uncertainty in the distributions obtained by averaging the uncertainties of several experts will be larger than the uncertainties of each individual expert.
2. The distribution of model parameters may involve strong correlations, either positive or negative, which complicate the ways experts traditionally think about the models. Thus experts like to think of transfer coefficients in terms of 'retention half times'. In Figure 3.1, if we consider the Cortical Bone and ULI compartments in isolation, then the time at which half of a unit deposit to Cortical Bone is transferred to the ULI is $\frac{\ln(2)}{k_{35}}$, and is called the retention half time for Cortical Bone. Similarly, $\frac{\ln(2)}{k_{25}}$ is the retention half time for Trabecular Bone. These expressions suggest that k_{25} and k_{35} have a meaning independent of the model in which they are considered. This is not the case however as may become glaringly evident when k_{25} and k_{35} are assigned distributions as given in Table 5.3. Note from Table 5.2 that these variables have a strong negative correlation. A "representative value" for k_{25} (e.g. the median) together with a "representative value" for k_{35} may not yield representative values for simple functions of (k_{25}, k_{35}) . Consider the following simple example: X and Y are uniformly distributed on $[0, 2]$ and completely negative correlated, so that $Y = 2 - X$. The median of X and Y is 1. Hence the product of the medians is 1, but 1 is also the *maximum* of XY ; the product of medians is not the median of the product.
3. If uncertainty over observable phenomena can be captured via a distribution over model parameters, then this can in general be captured in more than one way. In other words, if the probabilistic inverse of a distribution over observables exists, then it is generally not unique. Hence, two uncertainty analysts using different search algorithms and different heuristics might come up with two different distributions over the transfer coefficients in Figure 3.1, both of them adequately reproducing the uncertainty over observable phenomena.

7 Conclusions

The use of environmental models to capture uncertainty involves mathematical and conceptual problems. The probabilistic inversion techniques currently available cannot handle models much larger than that of Figure 3.1. Research is in progress to develop new solution algorithms and new heuristics for dealing with larger models. To date the choice of elicitation variables has been driven by heuristics and practical constraints. For example, elicitation variables must be familiar to the experts and the number of elicitation variables must remain relatively small. Finally, the use of models to capture uncertainty rather than to make simple predictions requires experts and decision maker to think about these models in new and different ways.

In spite of the above problems, the approach to uncertainty modeling described above has been broadly successful within the context of the joint CEC/USNRC uncertainty analysis, and can in principle be applied to a wider range of problems.

References

- [1] E.D. Andersen and Y. Ye. A computational study of the homogeneous algorithm for large-scale convex optimization. *Computational Optimization and Applications*, 10:243–269, 1998.
- [2] R.M. Cooke. *Experts in Uncertainty: Opinion and Subjective Probability in Science*. Oxford University Press, New York, 1991.
- [3] F.T. Harper, L.H.J. Goossens, J. Boardman, M.L. Young, B.C.P. Kraan, R.M. Cooke, S.C. Hora, and J.A. Jones. Joint USNRC/CEC consequence uncertainty study: Summary of objectives, approach, application, and results for the deposited material and external doses assessments. Technical Report NUREG/CR-6526 and EUR 16772 and SAND97-2323, Sandia National Laboratories and Delft University of Technology, Washington DC, United States of America, 1997.
- [4] F.T. Harper, L.H.J. Goossens, J. Brown, F.E. Haskin, B.C.P. Kraan, M.L. Abbott, R.M. Cooke, M.L. Young, S.C. Hora, J.A. Jones, and A. Rood. Joint USNRC/CEC consequence uncertainty study: Summary of objectives, approach, application, and results for the food chain uncertainty assessment. Technical Report NUREG/CR-6523 and EUR 16771 and SAND97-0335, Sandia National Laboratories and Delft University of Technology, Washington DC, United States of America, 1997.
- [5] F.T. Harper, L.H.J. Goossens, R.M. Cooke, J.C. Helton, S.C. Hora, J.A. Jones, B.C.P. Kraan, C. Lui, M.D. McKay, L.A. Miller, J. Päsler-Sauer, and M.L. Young. Joint USNRC/CEC consequence uncertainty study: Summary of objectives, approach, application, and results for the dispersion and deposition uncertainty assessments. Technical Report NUREG/CR-6244 and

- EUR 15855 and SAND94-1453, Sandia National Laboratories and Delft University of Technology, Washington DC, United States of America, 1994.
- [6] F.T. Harper, L.H.J. Goossens, J.D. Harrison, B.C.P. Kraan, R.M. Cooke, and S.C. Hora. Joint USNRC/CEC consequence uncertainty study: Summary of objectives, approach, application, and results for the internal dosimetry uncertainty assessments. Technical Report NUREG/CR-6571 and EUR 16773 and SAND98-0119, Sandia National Laboratories and Delft University of Technology, Washington DC, United States of America, 1998.
- [7] F.T. Harper, L.H.J. Goossens, F.E. Haskin, B.C.P. Kraan, and J.B. Grupa. Joint USNRC/CEC consequence uncertainty study: Summary of objectives, approach, application, and results for the early health effects uncertainty assessments. Technical Report NUREG/CR-6545 and EUR 16775 and SAND97-2689, Sandia National Laboratories and Delft University of Technology, Washington DC, United States of America, 1997.
- [8] F.T. Harper, L.H.J. Goossens, M.P. Little, C.R. Muirhead, B.C.P. Kraan, R.M. Cooke, and S.C. Hora. Joint USNRC/CEC consequence uncertainty study: Summary of objectives, approach, application, and results for the late health effects uncertainty assessments. Technical Report NUREG/CR-6555 and EUR 16774 and SAND97-2322, Sandia National Laboratories and Delft University of Technology, Washington DC, United States of America, 1997.
- [9] ICRP. Age-dependent doses to members of the public from intakes of radionuclides. Technical Report ICRP Publication 67, International Committee of Radiation Protection, Elsevier Science Ltd., Oxford, 1994.
- [10] J.N. Kapur. *Maximum Entropy Models in Science and Engineering*. Wiley, New York, 1989.
- [11] B.C.P. Kraan and R.M. Cooke. Post-processing techniques for the joint cec/usnrc uncertainty analysis of accident consequence codes. *Journal of Statistical Computation and Simulation*, 57:243–260, 1997.
- [12] J.P. Kullback. *Information Theory and Statistics*. Wiley, New York, 1959.

A Elicitation Questions

These questions cover important contributions to uncertainty in calculating doses from radionuclides reaching blood. Factors omitted that might also contribute significantly to uncertainties are the location of sensitive cells in Bone and absorbed fractions for alpha- and beta- emitting bone-seekers, and tissue mass and geometric considerations.

Considering the total amount reaching blood (as if administered intravenously as a single injection). % retained in Liver and Skeleton (Bone+Bone marrow), as a function of time after entry into blood?

	5 year old children			Adults		
	5%	50%	95%	5%	50%	95%
Skeleton and Liver, 1 day						
<i>Sr</i>						
Skeleton and Liver, 1 week						
<i>Sr</i>						
Skeleton and Liver, 1 month						
<i>Sr</i>						
Skeleton and Liver, 1 year						
<i>Sr</i>						
Skeleton and Liver, 10 years						
<i>Sr</i>						
Skeleton and Liver, 50 years						
<i>Sr</i>						

Retention in the Skeleton, % total retention in Liver + Skeleton (Bone+Bone marrow), as a function of time after entry into blood

	5 year old children			Adults		
	5%	50%	95%	5%	50%	95%
Skeleton, 1 day						
<i>Sr</i>						
Skeleton, 1 week						
<i>Sr</i>						
Skeleton, 1 month						
<i>Sr</i>						
Skeleton, 1 year						
<i>Sr</i>						
Skeleton, 10 years						
<i>Sr</i>						
Skeleton, 50 years						
<i>Sr</i>						