

## Scale-up of syngas converting bioreactors

**PhD-student:** Lars Puiman

Tel: +31 6 41 94 48 33

e-mail: l.puiman@tudelft.nl

**Supervisors:** Cees Haringa, Cristian Picioreanu

**Promoters:** Henk Noorman

**Institute:** Delft University of Technology, Department of Biotechnology, Bioprocess Engineering section

**Project term:** March 2020 – March 2024

**Financed by:** NWO – MicroSynC



### Description

The potential in the production of sustainable fuels has increased during the last years by the introduction of several waste conversion technologies. One of the methods to convert waste streams into bio-ethanol (and other biofuels) is using syngas fermentation. Syngas, a mixture with CO, H<sub>2</sub> and CO<sub>2</sub> as main constituents, can easily be obtained from gasification of agricultural residues, from electrolysis of CO<sub>2</sub> and from industrial waste streams (Abubackar et al. (2011), Köpke & Simpson (2020)).

The syngas is subsequently converted into ethanol in by acetogenic bacteria like *Clostridium autoethanogenum*. This conversion is the basis of the industrial process for ethanol production from syngas, which is being done now at larger scales (e.g. by companies such as LanzaTech). This conversion takes place in gas-lift reactors (see Figure 1). In this reactor, the syngas is fed from the bottom and rises to the top in the riser part. The downcomer enables recirculation of the liquid and the biomass. This way, liquid mixing is enabled, whilst maintaining concentration gradients in the gas and liquid phases. These concentration gradients are expected to impact the metabolism of the organism substantially, causing large deviations in syngas consumption rates along the reactor height.

By coupling fluid dynamics with the cellular dynamics, the spatial differences in microbial behaviour can be determined. This will be used for the development of optimal reactor models for industrial syngas fermentation processes.

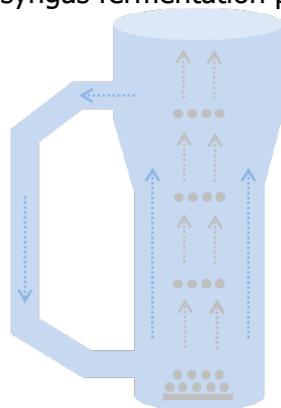


Figure 1. Schematic representation of an airlift reactor used for syngas fermentation, describing the mixing pattern.

## References

Abubackar, H. N., Veiga, M. C., & Kennes, C. (2011). Biological conversion of carbon monoxide: rich syngas or waste gases to bioethanol. *Biofuels, Bioproducts and Biorefining*, 5(1), 93-114.

Köpke, M., & Simpson, S. D. (2020). Pollution to products: recycling of above ground carbon by gas fermentation. *Current opinion in biotechnology*, 65, 180.